

DTT-11/14 DYNAMIC TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" Touch II
 USB Connection. PC software free of charge for programming, traceability, data analysis...
 Videos on display (ads, instructions, etc.)
 37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
 Stainless steel drum as standard
 Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
 Big fluff filter



VERSATILITY

Make to order - customisation
 WET CLEANING
 OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



CONNECTIVITY

IoT Domus Connect
 Management of laundries: OPL and COIN
 Remote payment (coin laundry)



ERGONOMICS

Drawer as fluff filter, made of stainless steel
 Biggest door diameters
 Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
 Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.



OTHERS

Grey skinplate outer casing, stainless steel look
 SOFT DRY - new drum with stamped holes
 COOL DOWN - anti-wrinkle at the end of the cycle
 Heating options: electric, gas and steam
 CE approved




OPTIONS

- EFFICIENT DRY - Intelligent humidity control with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- SFEX - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- DomusConnect-IoT communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models:
440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTT-11 DYNAMIC		DTT-14 DYNAMIC	
CAPACITY					
Capacity 1/18	Kg	12		15	
Capacity 1/20	Kg	11		13,5	
Hourly Output DYNAMIC*	Kg/h	23-21		34-30	
Evaporation capacity DYNAMIC*	l/h	14,5		15,40	
DRUM					
Ø Drum	mm	750		750	
Ø Door (load hole)	mm	574		574	
Door center height	mm	976		976	
Load hole bottom height	mm	689		689	
Drum length	mm	475		610	
Drum volume	l	210		270	
POWER					
Drum motor power	Kw	0,37		0,37	
Fan motor power DYNAMIC	Kw	0,25		0,25	
Electric heating power ALL RANGES	Kw	12		18	
Total electric power (elec.model) DYN	Kw	12,67		18,67	
Gas heating power ALL RANGES	Kw	20,51		20,51	
Total electric power (gas model) DYN	Kw	0,67		0,67	
Steam heating power ALL RANGES	Kw	30		30	
Steam heating power (gas model) DYN	Kw	0,67		0,67	
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 / 63A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow DYNAMIC	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level DYNAMIC	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

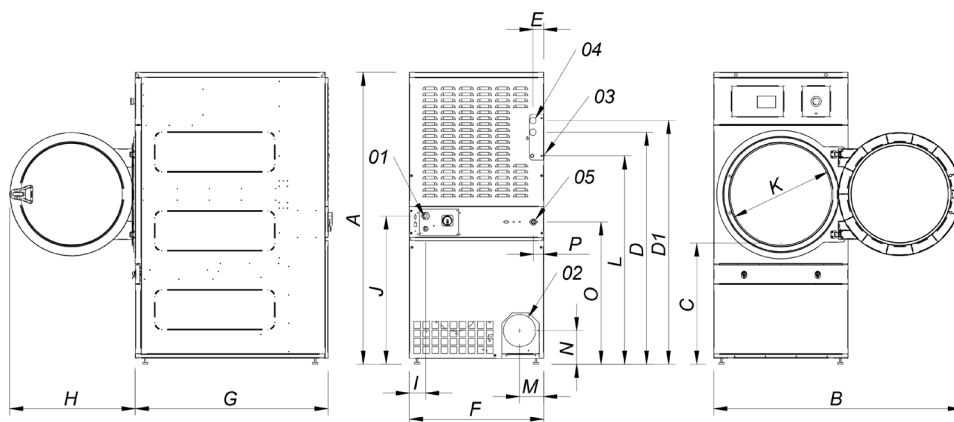

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DTT-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
DTT-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65